


# FirePro Fire Suppression Automatic Total Flood System on Detection Layout

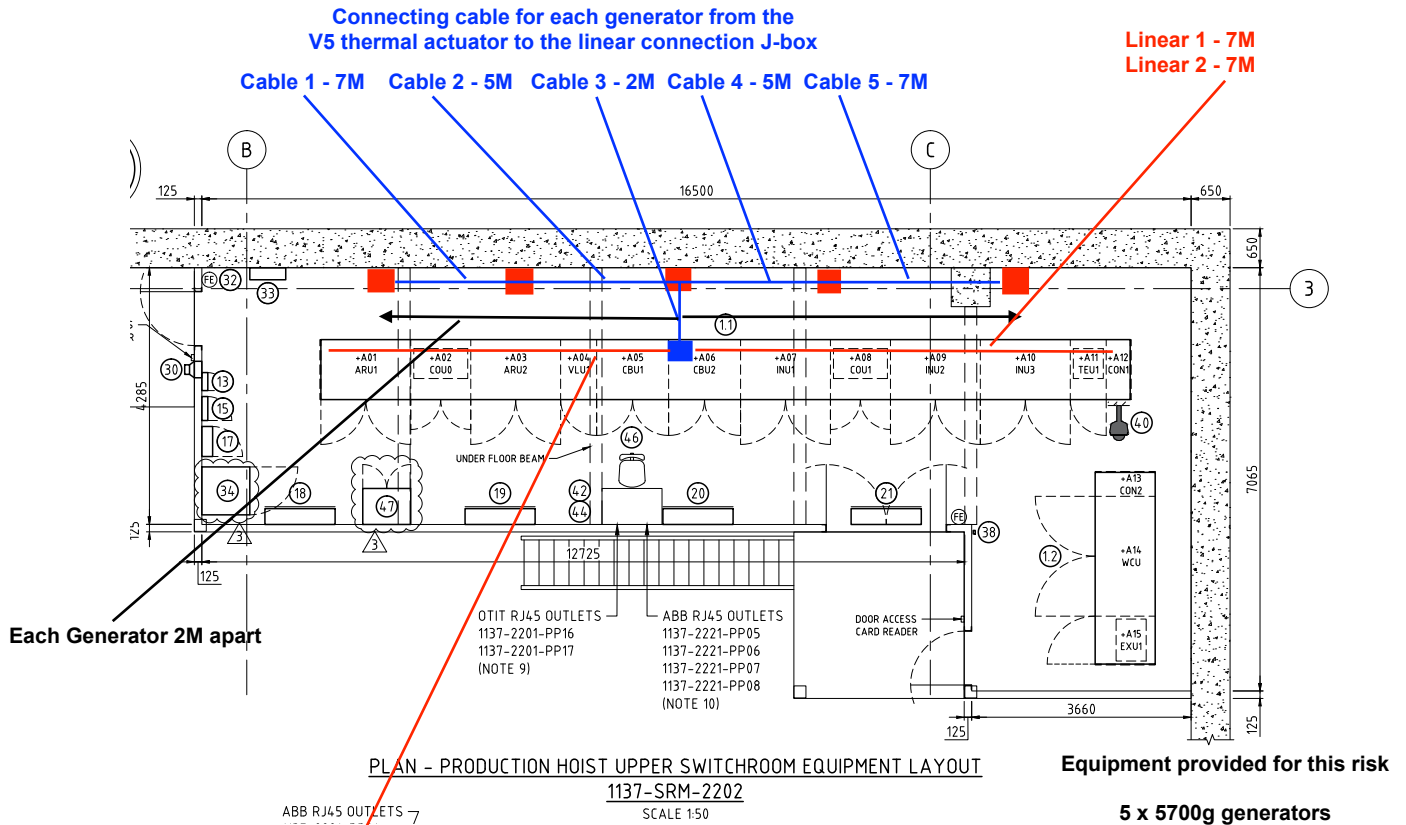


Linear cables c/w deutsch plugs

Note FirePro equipment for this risk will be named as per drawing

Equipment provided for this risk

- 5 x 5700g generators
- 5 x V5 thermal actuators fitted to the generator
- 5 x FP-6100 mounting brackets
- 2 x 7M linear detection cables 182degC c/w deutsch plug connectors & mounting clips
- 5 x fire rated screened connecting cables c/w deutsch plug connectors
- 1 x connecting J-box c/w deutsch plug connectors.
- 20 x Ramset bolts for fitting bracket
- 2 x Warning signs

Ceiling to top of holding bracket approx. 500mm  
NOTE the generator should be positioned to avoid other cable trays , AC ducts etc

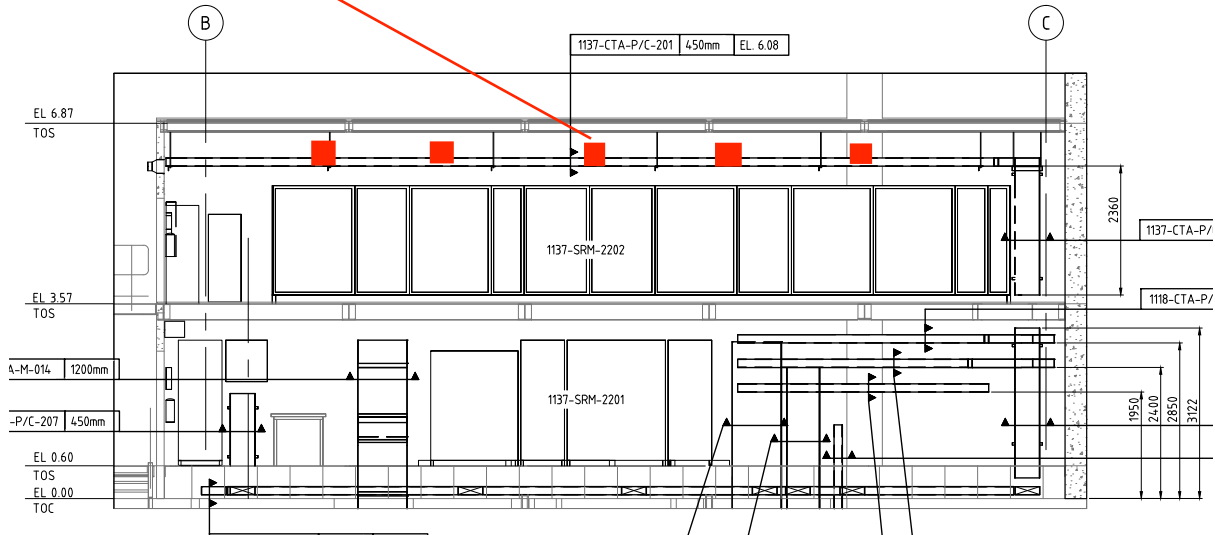

**Fire Safety Equipment**  
 Revision # A1 - Location of Firepro fire suppression generators.  
 Purchase order # - CW2147461  
 Project # -3011010265  
 Jaw Crusher – 1813-ESS-2001-MC Drawing # - 1813-65-K2-1858