



Quality is Behind the Diamond®

Amerex Corporation

Manufactured to
ANSI / UL Standards
AS & NZ Standards
ISO-9001 / ISO-14001 Certified

EXTRA FEATURES

- Superior Range (Vertical & Horizontal)
- High (240 psi) Operating Pressure
- Choice of Chemicals ABE Multi Purpose, BE, or Purple K
- Select Fast Flow for
 - High Flow Rate
 - Fast Discharge
 - Quicker Knockdown
 - More Operator Protection
- Select Fast Flow for
 - Long Range
 - Highest U.L. Ratings
- Epoxy Painted GALVANISED STEEL Cylinders
- Protective Rubber Foot Rings
- All Metal Valve Construction
- Gauge Guards
- Temperature Range -53°C to 50°C
- Bar Coded Labels
- 12 Year Warranty
- U.S. Coast Guard approved with bracket listed on U.L. Label



HIGH PERFORMANCE extinguishers are the ultimate choice in fire extinguishers for high hazard, frequent use and extreme environment applications. Economical - less initial cost, lower maintenance costs, and greater reliability than cartridge operated extinguishers.

Specifications

Type	FAST FLOW						COMPLIANCE FLOW				
	ABE		BE		Purple K			ABE		Purple K	
Agent	Hose & Nozzle		Hose & Nozzle		Hose & Nozzle			Hose & Nozzle		Hose & Nozzle	
Size & Capacity	9kg	13.6kg	9kg	13.6kg	9kg	9kg	13.6kg	9kg	13.6kg	9kg	13.6kg
Model Number	581	567	582	568	580	584	569	564	589	566	
U.L. Rating	4A:40B:C	4A:40B:C	40B:C	40B:C	40B:C	20B:C	40B:C	20A:120B:C	20A:160B:C	120B:C	160B:C
AS/NZ Model	A-581	-	-	-	A-580	-	-	A-564	-	A-566	-
AS/NZ Rating	2A:40B:E	-	-	-	40B:E	-	-	4A:80B:E	-	80B:E	-
Shipping Wt Kg.	19.2	26.3	19.2	26.3	19.2	19.2	26.3	19.2	26.3	19.2	26.3
Height mm	629	673	629	673	629	629	673	629	673	629	673
Width mm	267	279	267	279	267	267	279	267	279	267	279
Depth mm	178	203	178	203	178	178	203	178	203	178	203
Range m	12 - 15		12 - 15		12 - 15			12 - 15		12 - 15	
Discharge Rate kg/Sec	0.50	0.65	0.40	0.80	0.40	0.90	0.85	0.30	0.40	0.31	0.40
Discharge Time	18	21	15	17	15	10	16	30	34	29	34
Std Bracket	Wall Bracket		Wall Bracket		Wall Bracket			Wall Bracket		Wall Bracket	


HIGH PERFORMANCE DRY CHEMICAL



FEATURES:

- Exclusive galvanized cylinder - the best corrosion resistance
- Brass, chrome plated valve gauge guard - no aluminium parts
- Stored pressure design for less maintenance costs, fewer replacement parts
- Simple P.A.S.S. operation , familiar to all potential extinguisher operators
- Extra large stainless steel handles pin for easy operation with gloves
- Stored pressure design prevents unnoticed tampering and clogged elbows or hoses
- Always - longest range of any hand portable on the market - greater operator safety
- Charged with nitrogen - all models operate down to -65°F
- Inexpensive to recharge, no cartridges to buy or exchange
- Molded vinyl ring to protect paint on the bottom
- Best warranty in the industry - 12 years

MADE IN USA

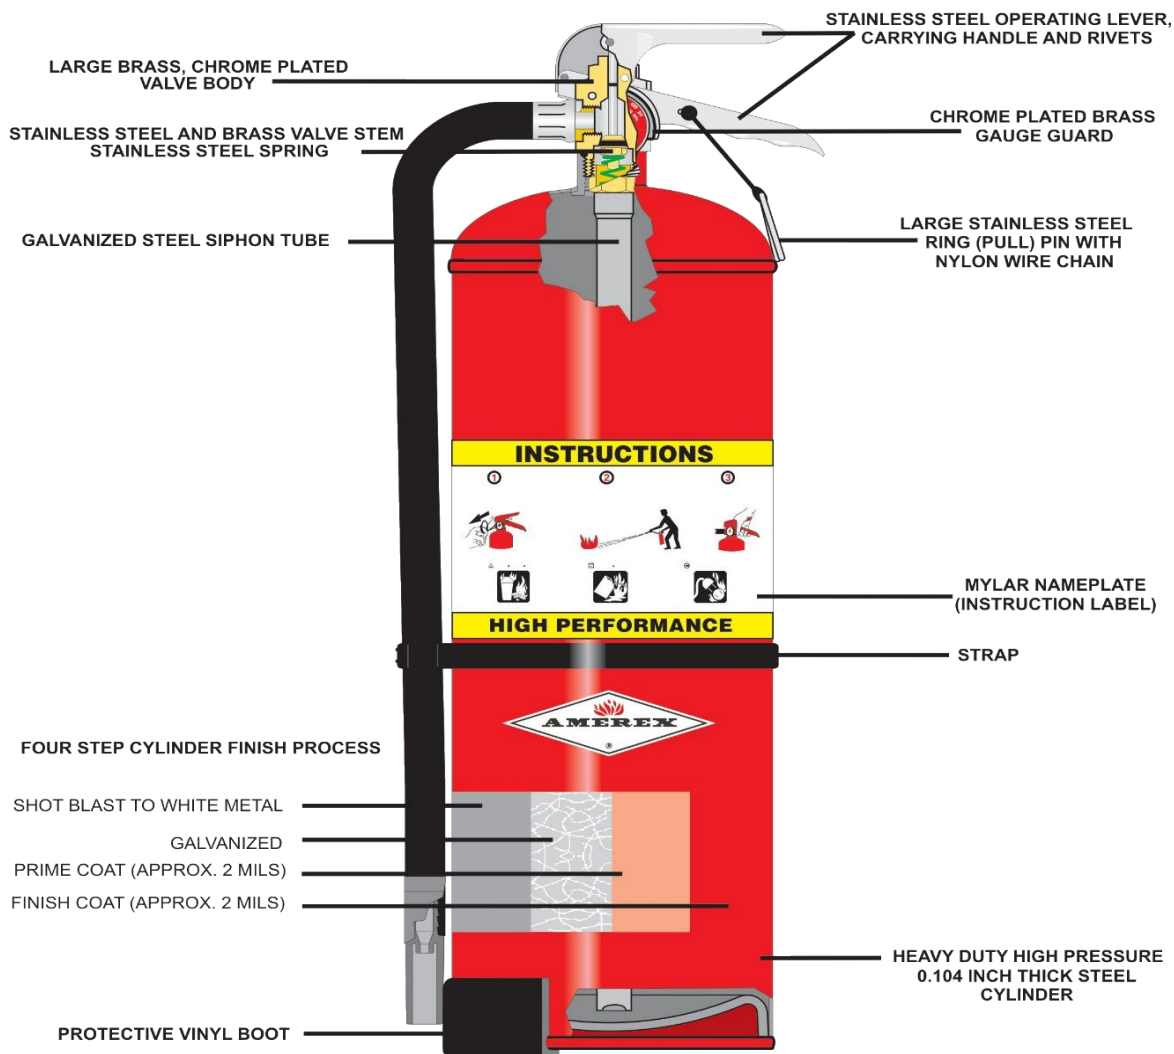

HIGH PERFORMANCE DRY CHEMICAL