



Quality is Behind the Diamond®

Amerex Corporation

Manufactured to
ANSI / UL Standards
AS & NZ Standards
ISO-9001 / ISO-14001 Certified

RUGGED

- Heavy Duty Steel Carriage
- Quick Opening Brass Valve
- Reinforced Wire Braided Hose
- Brass Hose Fittings
- No EPA phase out or restrictions
- No Global Warming concerns
- Non Magnetic construction
- Squeeze Grip Chrome Plated Discharge Valve
- Shock Resistant Horn to Reduce Static Electricity
- Clean, Non-Contaminating Odorless Gas
- 5 Year Warranty



Large volume CO2 protection provided in either 50lb or 100lb (2 x 50lb Cylinders) government specification wheeled extinguishers. Rugged construction and easy to operate with a quick opening handle valve and horn mounted shut-off valve. A logical choice in areas where a Class B:E noncontaminating agent is required.


Ideal for Raised Platforms where portable extinguishers are insufficient.

SPECIFICATIONS	Carbon Dioxide CO2	
Model Number	333	334
Application	Hose & Wand	
Agent	Carbob Dioxide CO2	
U.L Rating	20B : C	20B : C
Capacity	9.5 Litres	6.8 Litres
Shipping Wt (Empty)	117 kg	210 kg
Dimensions	1200 x 590 x 1220	1200 x 590 x 1220
Hose Length	4.5 m	12 m
Wheels	410 x 102 mm	410 x 102 mm
Range	3 - 5m	3 - 5m
Discharge time Sec	44	74
Operating Temperature	-30deg C to +49deg C	



Ideal for Helideck's

Optional Equipment

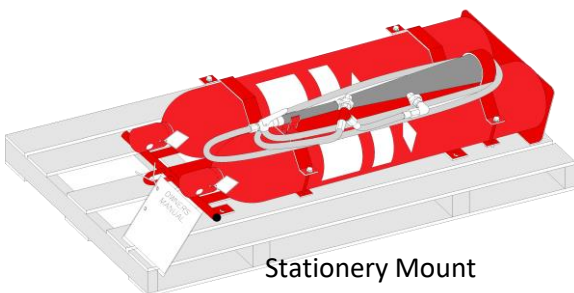

Stationery Mount



Extension Lance
Customised Wand
Lengths available

Optional 12m
Extended Hose for
Model 333

WHEELED - 50lb & 100lb Carbon Dioxide